



The EXACT-P3™ Pneumatic Positioner controls the position of a rotary actuator and its final control element by modulating the flow of supply air to the actuator in response to a controlled input pressure of 3 to 15psi. The EXACT-P3 positioner has a NEMA 4X enclosure rating and can be installed on a Spring Return or Double Acting rotary actuator. The air consumption of the EXACT-P3 is 0.23 SCFM (at 80 psi).

**MATERIALS OF CONSTRUCTION**

ITEM	DESCRIPTION	MATERIALS SPECIFICATIONS
1	Cover	Die Cast Aluminum
2	Span Unit	Die Cast Aluminum
3	Connector	Die Cast Aluminum
4	Bellows Mechanism	Copper Bellows
5	Zero Unit	Stainless Steel
6	Base Body	Die Cast Aluminum
7	Pilot Valve	Die Cast Aluminum Stainless Steel
8	Cam	Stainless Steel
9	Feedback Shaft	Stainless Steel




**EXACT-P3™ Zero and Span Adjustment**

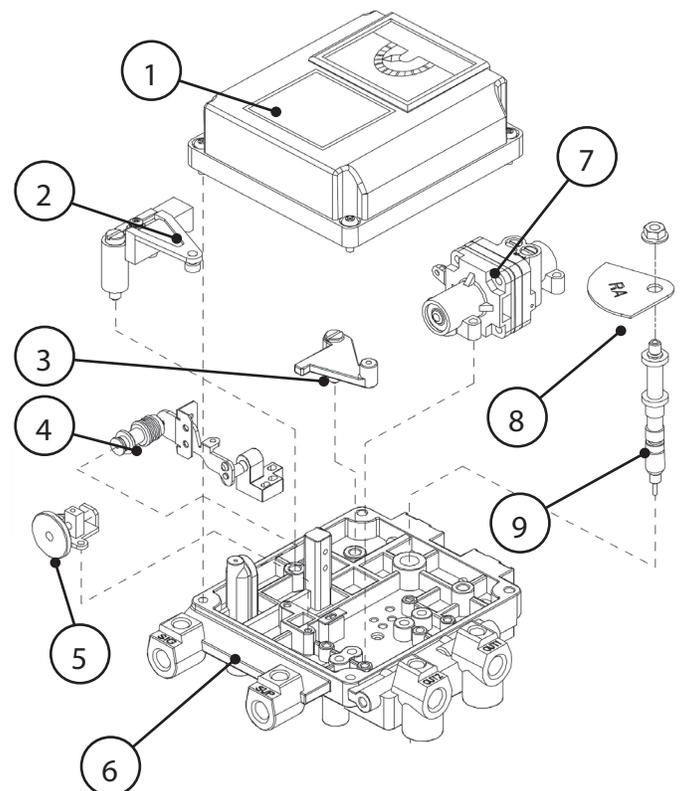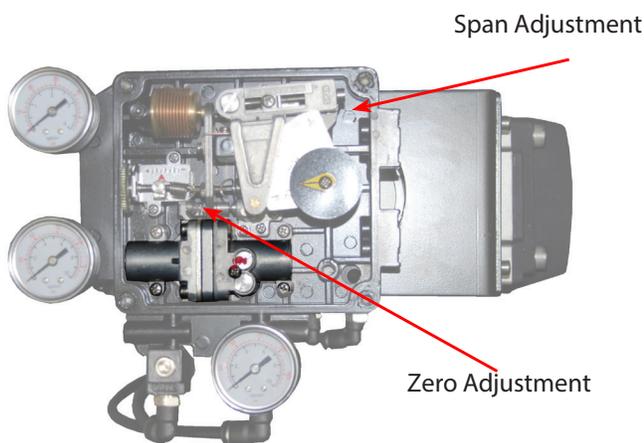


**EXACT-P3™ DIMENSION**

A		B		C		D		E		F		G		H	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
5.06	128.5	9.33	237	1.77	45	1.04	26	1.32	34	0.79	20	3.15	80	5.12	130
J		K		L		M		Air Consumption*							
in.	mm	in.	mm	in.	mm	in.	mm	SLPM				SCFM			
7.32	186	5.24	133	4.80	122	6.52	165.5	6.50				0.23			

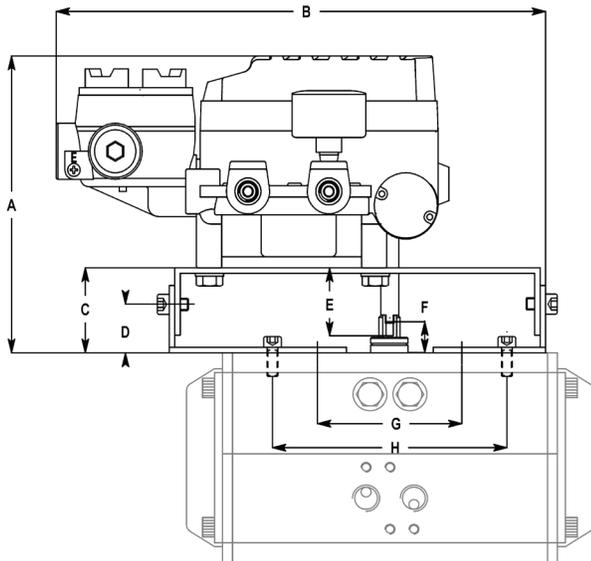

Standard NAMUR Dimensions

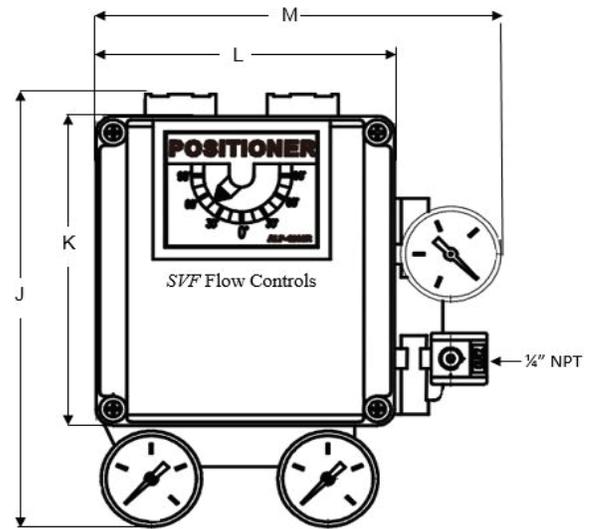

\*Air Consumption @ 80psi

ORDER CODE PART NUMBER: EXACT-P3